

CERAFLO® INSERT ULTRAFILTRATION SYSTEM



Easy Filtration For Life



MU01-U850



MU06-U740



MU24-U765



MU50-U765

Ultrafiltration Membrane type available

- Hydrophilic modified PAN
- Hydrophilic modified PTFE
- Hydrophilic modified Solid PVDF
- Hydrophilic modified Braided PVDF

Ceraflo MU system advantage

- ✓ Low OPEX
- ✓ Low membrane fouling rate
- ✓ Able to self flow
- ✓ Low backwash/CIP frequency
- ✓ Easy maintenance
- ✓ System flexibility and scalability

System	MU-01	MU-06	MU-24	MU-50
Electrical power (system only)	0.75 kW, 230 V	0.75 kW, 230 V	3 kW, 230 V	6.4 kW, 400 V
Weight (kg)	30	300	1400	4800
Length (m)	0.5	1.1	1.8	5.0
Width (m)	0.4	0.6	1.1	1.8
Height (m)	1.6	1.9	2.1	2.2

Note: Ceraflo Pte Ltd reserves the right to make any changes to the information provided above without prior notice




Ceraflo Pte Ltd 32 Marsiling Lane Singapore 739151

Tel: +65 6366 0250 Fax: +65 6366 0255 Email: info@ceraflo.com Website: www.ceraflo.com

CERAFLO® CURTAIN ULTRAFILTRATION SYSTEM



Easy Filtration For Life

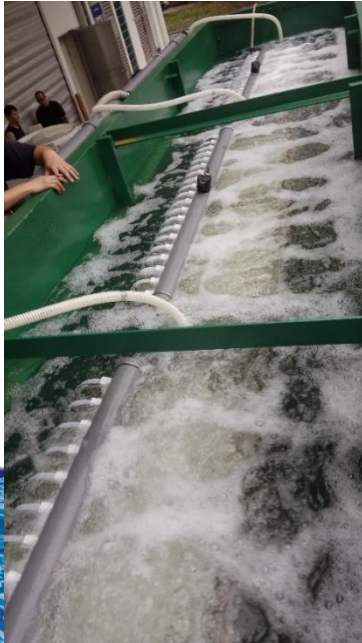

AMBRC20

System	AMBRC20	AMBRC400
Electrical power (system only)	0.37 kW, 230 V	4 kW, 230 V
Weight (kg)	160	3,500
Length (m)	1.66	8.40
Width (m)	0.54	1.20
Height (m)	1.80	1.80

Note: Ceraflo Pte Ltd reserves the right to make any changes to the information provided above without prior notice



Ceraflo Pte Ltd 32 Marsiling Lane Singapore 739151
Tel: +65 6366 0250 Fax: +65 6366 0255 Email: info@ceraflo.com Website: www.ceraflo.com